

Series CR

• CR1600 • ECR1600 • CR6600 • ECR6600

To handle live electric cable.

- 3-conductor, 45-amp, 600-volt collector assembly with #8 gauge wiring.
- Double brushes per circuit. Brushes are copper graphite, copper alloy rings.
- Additional conductors or higher amperage (up to 100 amps) are available at extra cost, must be specified. (300 amps possible with custom design.)
- Silver collector assemblies are available.
- Rollers and roller mounting brackets are accessory items. Specify roller position.

Series CR1600

- Removable direct crank rewind.
- Adjustable cam-lock drag brake.

Series ECR1600*

- Optional strap brake is available.
- Some roller options may prohibit the use of our molded chain guard.

Series CR6600

- Gear-driven crank rewind.

Series ECR6600

- Chain and sprocket drive powered by electric, compressed air or hydraulic motor.
- Auxiliary rewind and pinion brake standard.
- Consult factory for other brakes.
- Optional chain guards are available upon request.



Optional External Mounting Brackets

Part No. 9906.0025,
Available for CR1600 and ECR1600 models.

* For CR reels with minimized height or depth requirements, refer to our Rescue Reels catalog H-0503-R.



ELFCR1600 shown

Choose an ELFCR model when height of reel must be minimized.



ESFCR1600 shown

Choose an ESFCR model when depth of reel must be minimized.



Series CR1600 (Manual Rewind)
Standard configuration shown



Series ECR1600 (Power Rewind)
Standard configuration shown



Series ECR6600 (Power Rewind)
Optional left top configuration shown

Series **CR**

• CR1600 • ECR1600 • CR6600 • ECR6600

PARTS DRAWING – SERIES CR1600 – ISO 76; SERIES CR6600 – ISO 45

Model Number For power rewind see Note 5	Cable Capacity of Reel feet m						Approx. Weight Crank Rewind lb. kg		Reel Dimensions*** In. mm										
	O.D. in. mm	Ga./No. of Conductors							A	B	C	D	E CRANK	E POWER	F CRANK	F POWER	G	H	X
		12/3	10/3	8/3	12/4	10/4													
		40 12	49 18	73 19	67 17	75 19													
CR1614-17-18	175	100	-	100	100	30	68*	11	6	6	14.13	16.5	19	22.5	17.5	18.12	9.88	9.5	10
	53	30	-	30	30	14	31	279	152	152	359	419	483	571	445	460	251	241	254
CR1616-17-18	200	150	-	150	150	32	68*	13	8	6	14.13	16.5	19	24.5	19.5	18.12	9.88	11.5	10
	61	46	-	46	46	15	31	330	203	152	359	419	483	622	495	460	251	292	254
CR1618-17-18	275	200	-	200	200	33	80*	15	10	6	14.13	16.5	19	26.5	21.5	18.12	9.88	13.5	10
	84	61	-	61	61	15	36	381	254	152	359	419	483	673	546	460	251	343	254
CR1620-17-18	350	250	-	250	225	34	80*	17	12	6	14.13	16.5	19	28.5	23.5	18.12	9.88	15.5	10
	107	76	-	76	69	15	36	432	305	152	359	419	483	724	597	460	251	394	254
CR6614-19-20	150	100	-	125	100	113	148	11	5.5	10.5	20.5	22	22	16	16	21.5	12.12	5.75	16.75
	46	30	-	38	30	51	67	279	140	267	521	559	559	406	406	546	308	146	425
CR6614-23-24	300	225	175	250	200	120	155	11	5.5	10.5	20.5	23	23	16	16	23.5	12.12	5.75	16.75
	91	69	53	76	61	54	70	279	140	267	521	584	584	406	406	597	308	146	425
CR6614-25-26	350	250	200	300	225	133	168	11	5.5	10.5	25.5	24.75	24.75	16	16	27.88	15.5	5.75	21.75
	107	76	61	91	69	60	76	279	140	267	646	629	629	406	406	708	394	146	552

Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
- Dimensions reflect pressed frames.
- Weights shown in chart are for crank rewind models. Add these amounts for power rewind models:

Series CR1600

	Net lbs./kg	Ship lbs./kg
Electric	18/8.2	18/8.2
Hydraulic	15/6.8	15/6.8
Air	15/6.8	15/6.8

Series CR6600

	Net lbs./kg	Ship lbs./kg
Electric (1/3 HP)	18/8.2	18/8.2
Hydraulic	20/9.1	20/9.1
Air	20/9.1	20/9.1

- When ordering power rewind models, prefix model number with:

A = Air Rewind –
Supplied with control valve and
18" air hose.

E = Electric Rewind – (1/3 HP)
(Series CR1600 & CR6600)

EP = Electric Rewind – (1/2 HP)
(Series CR6600)
12v and 24v DC rewind reels are
supplied with switch and solenoid.
110v AC rewind reels are not
supplied with switch but can
be ordered separately.

HD = Hydraulic Rewind –
Not supplied with control valve.


- Add 2 1/8" to "A" dimension when using
external mounting brackets on CR1600,
ECR1600 Series reels.

- When ordering reels with a 4-conductor,
add 2" to "F" dimensions.


- Be sure to check dimensions and weights
prior to ordering.

* Dimensional weight applies when shipped
as a parcel package (via FedEx or
UPS Ground).


***X, Y indicate mounting holes. See page 2.

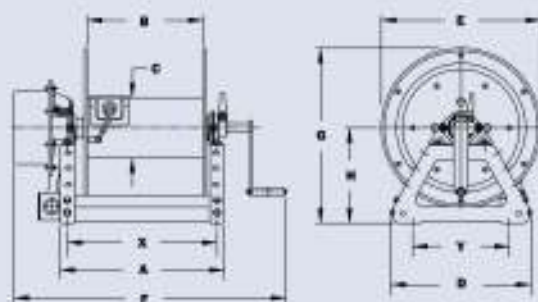

Series CR1600 (Manual Rewind)

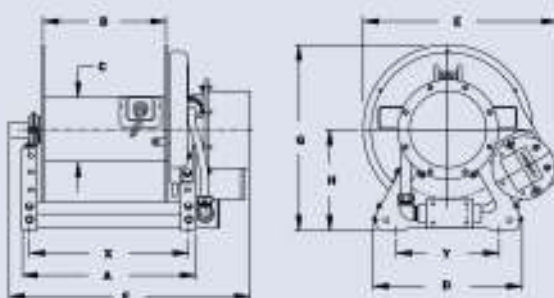

Series ECR1600 (Power Rewind)

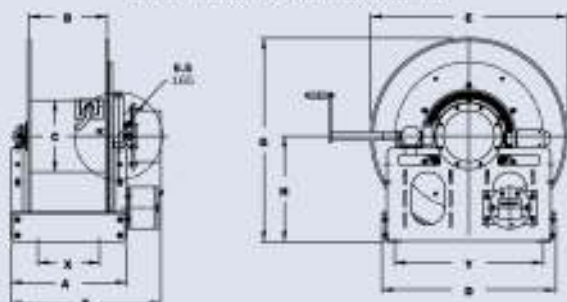

Series ECR6600 (Power Rewind)