

Model **LC16-10-11** Series **CR**

Model LC16-10-11 (Storage)

- Waterproof duplex receptacle for 3-pronged plug.
- Twist lock duplex is available.
- Adjustable cam-lock drag brake.
- Equipped with one durable rubber twist tie for cable ends.

Series CR (Live)

- Compact, lightweight, rugged construction.
- 3-conductor, 30-amp collector ring.
- 6 foot power source lead with 15-amp, 3-prong straight blade plug (optional twist lock is available).
- Adjustable cam-lock drag brake.

Rewind:

- Crank rewind permanent.



LC16-10-11

- For:
- Extension Cord
 - Broadcast Cable



Series CR

- For:
- Industrial
 - Broadcast
 - Agricultural
 - Fire and Rescue

PARTS DRAWING – MODEL LC16-10-11 – ISO 120; SERIES CR – ISO 156

Model Number	Cable Capacity of Reel feet m			Approx. Weight lb. kg		Reel Dimensions in. mm							
	O.D. in. mm	Ga./No. of Conductors				NET	SHIP	A	B	C	D	E	F
		14/3	12/3	14	15								
LC16-10-11	125	100		14	17*	11.75	7.5	4	11.88	10.75	12.25	15	6.88
	38	30		6	8	298	190	102	302	273	311	381	175
CR16-14-16	200	150		24	58*	9.25	7.5	6	15.5	14	14.5	18.5	8.88
	61	45		11	26	235	190	152	394	356	368	470	226
CR16-17-18	300	250		28	58*	9.25	7.5	6	15.5	16.5	14.5	18.5	8.88
	91	76		13	26	235	190	152	394	419	368	470	226

Notes:

1. Specifications subject to change.
 2. Be sure to check dimensions and weights prior to ordering.
- *Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).



LC16-10-11 includes one durable rubber twist tie for cable ends.


Part No. 9949.0082




Series CR

Optional 15-amp, 3-prong straight blade receptacle recessed in drum.

Part No. 9955.0090.

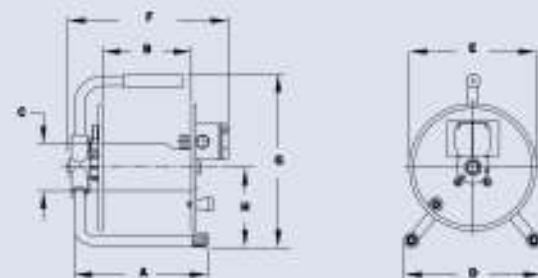

Model LC16-10-11

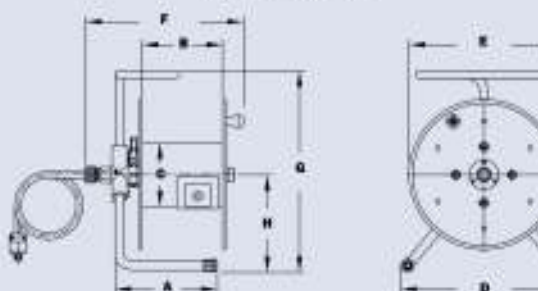

Series CR