

Model **C16-10-11/C20-14-16**

No live connections.

Model C16-10-11

- Small, lightweight, durable.
- Adjustable cam-lock drag brake.
- Optional storage drum extension.
- Equipped with one durable rubber twist tie for cable ends. "DE" models equipped with two ties.

Model C20-14-16

- Strong, portable.
- Adjustable cam-lock drag brake.
- Permanent crank rewind.
- Optional pin lock available.
- Optional storage drum extension.
- Equipped with one durable rubber twist tie for cable ends. "DE" models equipped with two ties.


C16-10-11

For:
• Broadcast Cable
• Extension Cord
• Rope


C16-10-11-DE


(DE = Drum Extension)


C20-14-16


For:
• Broadcast Cable
• Extension Cord
• Forestry Fire Hose
• Rope

PARTS DRAWING - MODEL C16-10-11 - ISO 88; MODEL C20-14-16 - ISO 121


Model Number	Cable Capacity of Reel feet (m)			Approx. Weight lb. (kg)		Reel Dimensions in. (mm)							
	O.D. in. mm	Ga./No. of Conductors 14/3 12/3											
					NET	SHIP	A	B	C	D	E	F	G
C16-10-11	125	100		10	20*	11.5	7.5	4	11.88	10.75	12.25	14.75	6.88
	36	30		5	8	292	191	102	302	273	311	375	175
C20-14-16	350	250		18	58*	15	12	6	15.5	14	16.75	19	8.62
	107	76		8	26	381	305	152	394	356	425	483	219
C16-10-11-DE	130	105		10	20*	11.5	7.5	4	11.88	10.75	14.25	14.75	6.88
	40	32		5	8	292	191	102	302	273	362	375	175
C20-14-16-DE	355	255		18	58*	15	12	6	15.5	14	18.75	19	8.62
	108	78		8	26	381	305	152	394	356	476	483	219

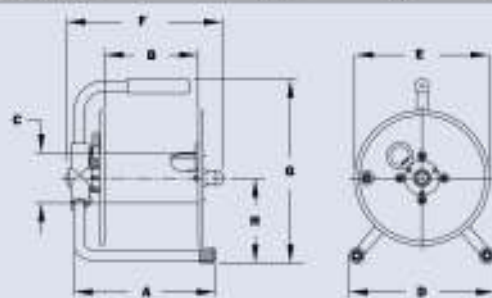

Model C16-10-11

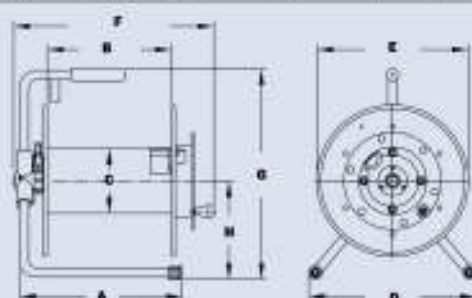

Model C20-14-16DE

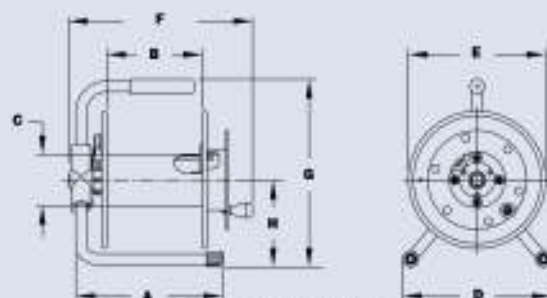

Model C16-10-11DE

Notes:

1. Specifications subject to change.
 2. These storage reels have no live connections.
 3. Be sure to check dimensions and weights prior to ordering.
- *Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).



C16-10-11 includes one durable rubber twist tie for cable ends.

Part No. 9949.0082