
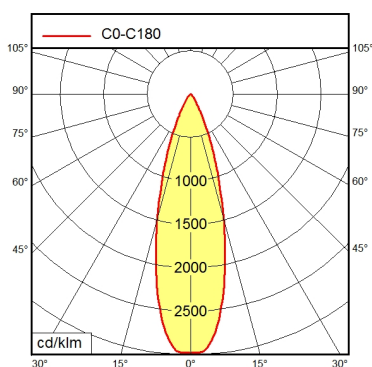


# Integrated machine luminaire SPOT LED MCEYL 3 S

112460003-00087891

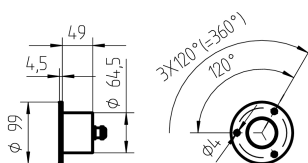

light source  
work equipment  
connected load  
power consumption  
luminous flux  
luminous efficiency  
light type/-color  
colour temperatur  
color rendering index  
light distribution  
glare control  
system of protection  
class of protection  
technology  
operation  
housing  
cover  
mains lead  
design  
fastening  
dimension  
special features

LED  
without  
24 V, AC/DC  
env. 6 W  
approx. 460 lm  
approx. 77 lm/W  
daylight  
approx. 5.400 K  
CRI > 72  
wide beam; direct; symmetric  
without  
IP 67  
III  
switchable; no notice  
external  
aluminium; anodised; black  
borosilicate  
ca. 3,00 m; with free stranded wires  
mounted version  
screws  
76  
Flood with 40° angle of radiation